

Design and Implementation of Sender Initiated Congestion Control

Eiichi Muramoto, Takahiro Yoneda, Kazunobu Konishi
Matsushita Electric Industrial Co., Ltd.
{ muramoto.eiichi, yoneda.takahiro , konishi.kazunobu} @jp.panasonic.com


Content

- Three parts
 - SICC protocol overview
 - Design and Implementation
 - Field Implementation
- Related work
- Conclusion
- Future work

Vision and Target

Real-time Group Communication over the Internet

e.g. Personal Broadcasting

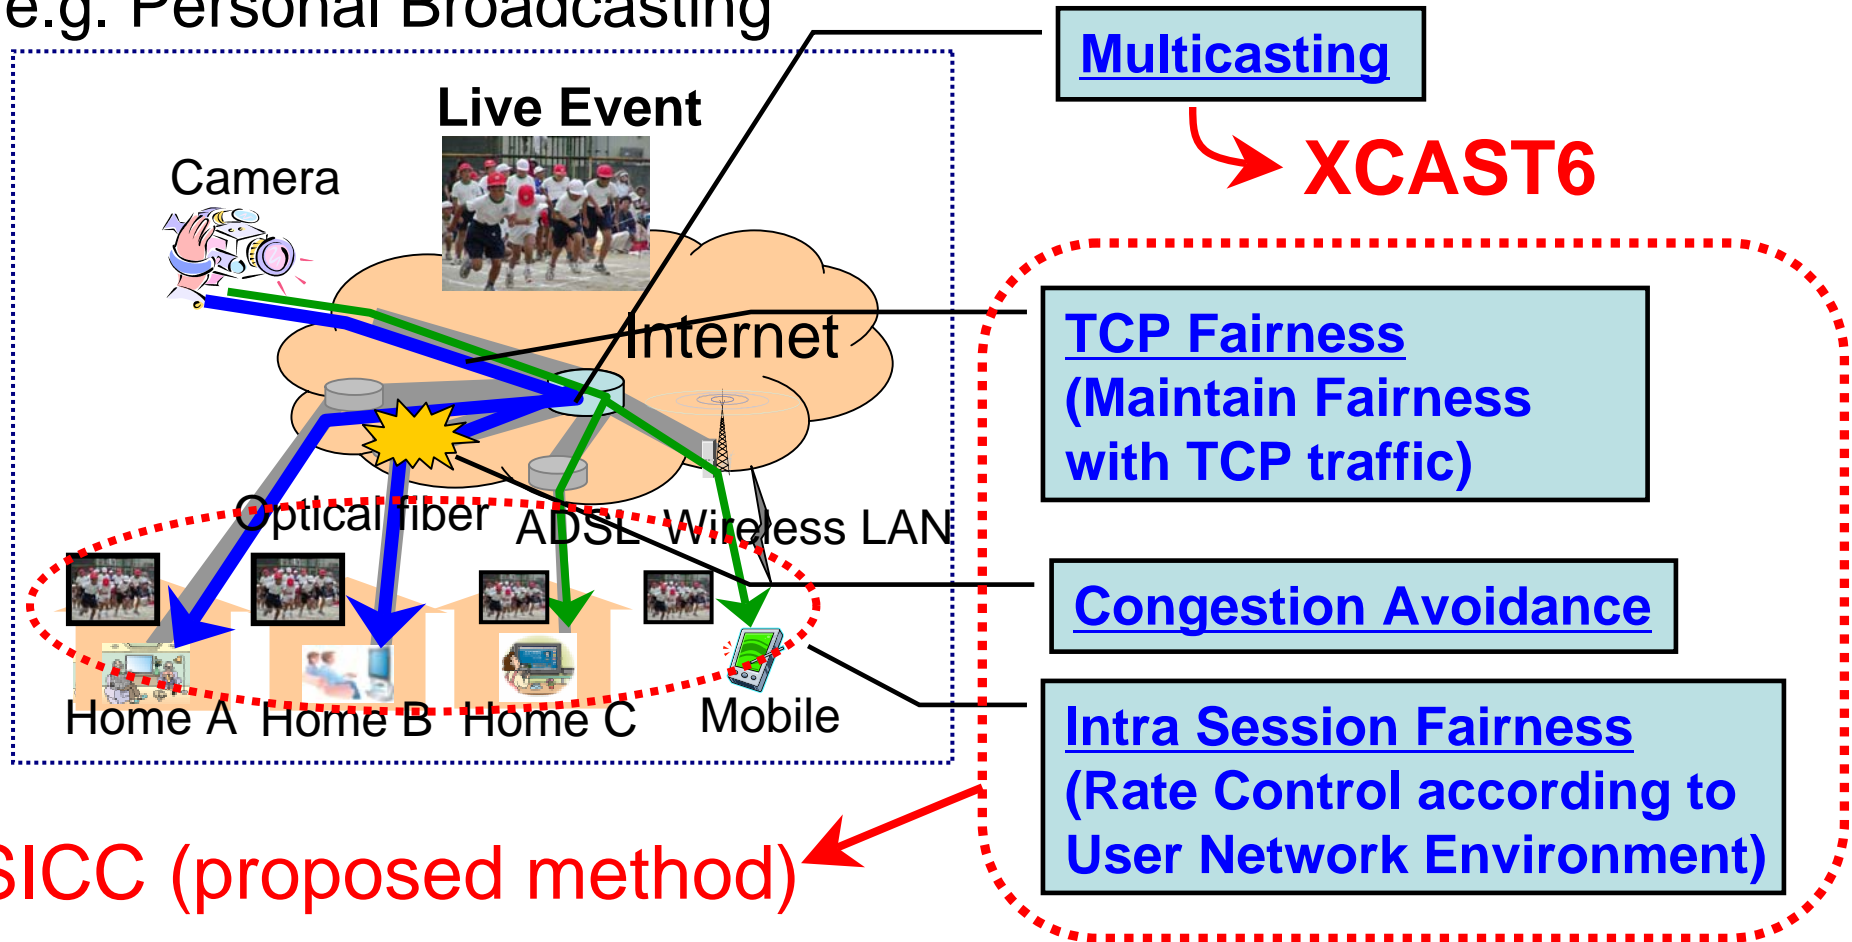

SICC: Sender Initiated Congestion Control


Panasonic ideas for life

SICC Protocol overview

- ◆ SICC CLASS
- ◆ Estimation of Sending Rate
- ◆ Rate Control Mechanism

SICC CLASS

- ◆ Prepare several CLASSes which transmit CBR stream using XCAST6

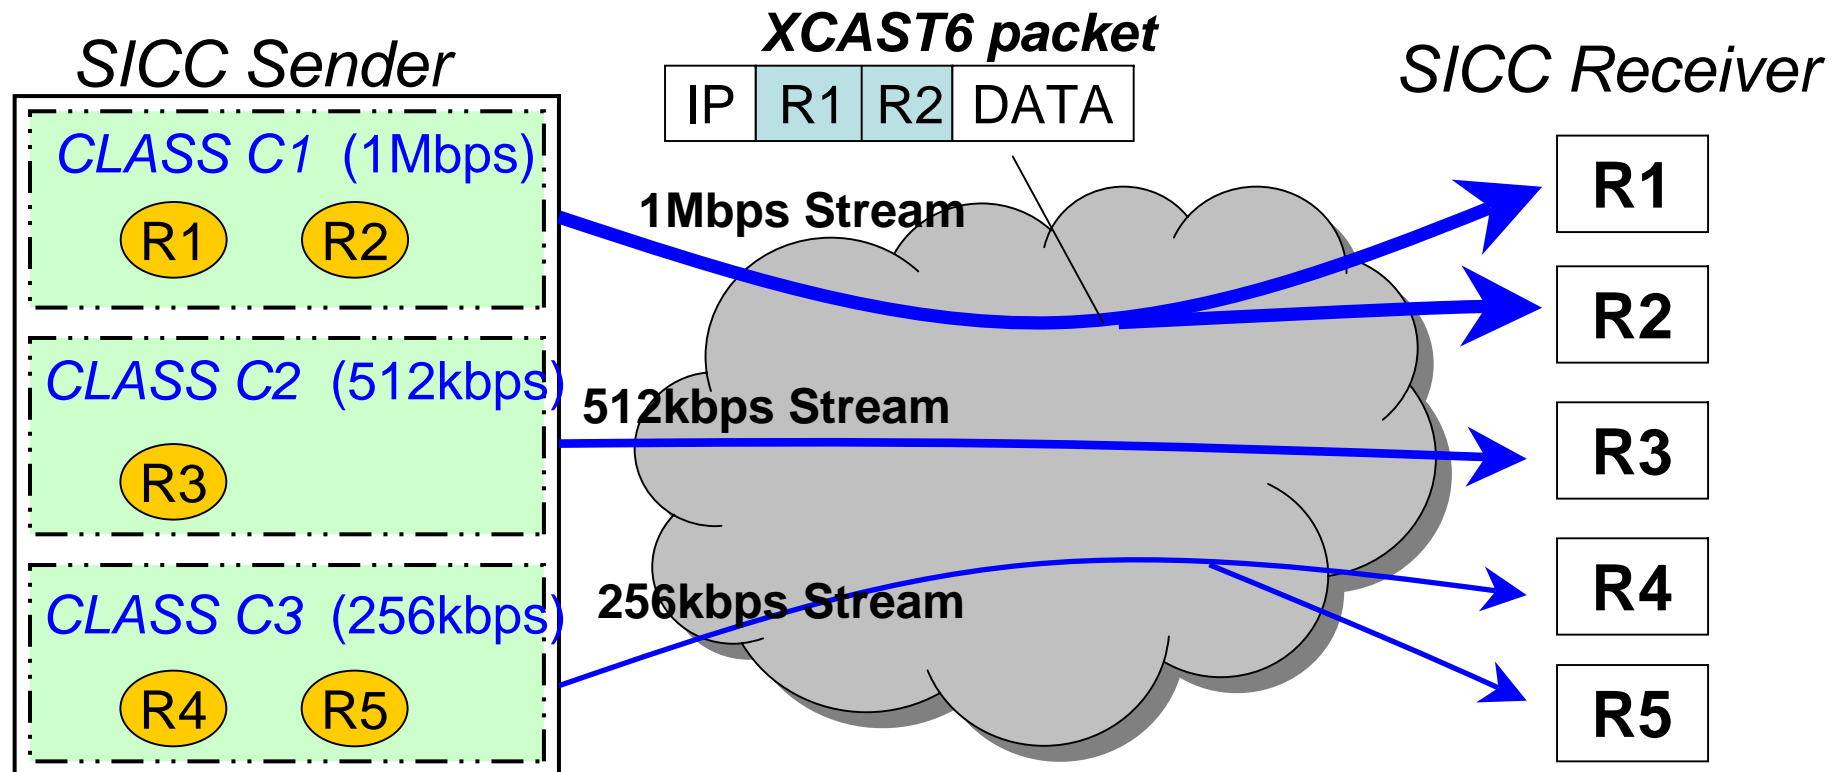

Estimation of Sending Rate

- ◆ Sender estimates the rate that each receiver can accept while maintaining TCP Fairness using TFRC[*] approach
- ◆ The sender classifies each receiver to Suitable CLASS based on each estimation

TFRC Equation

$$X_{cal} = \frac{8s}{R(\sqrt{2p/3} + 4R \times \sqrt{3p/8} \times p \times (1 + 32p^2))}$$

X_{cal} [bps] is acceptable sending rate


s [byte] is the packet size

R [sec] is the estimated RTT


p is the loss event rate

[*] M. Handley, S. Floyd, J. Padhye, J. Widmer, “*TCP Friendly Rate Control (TFRC): Protocol Specification*”, RFC3448, IETF, Jan.2003.


SICC Rate Control Mechanism (1)

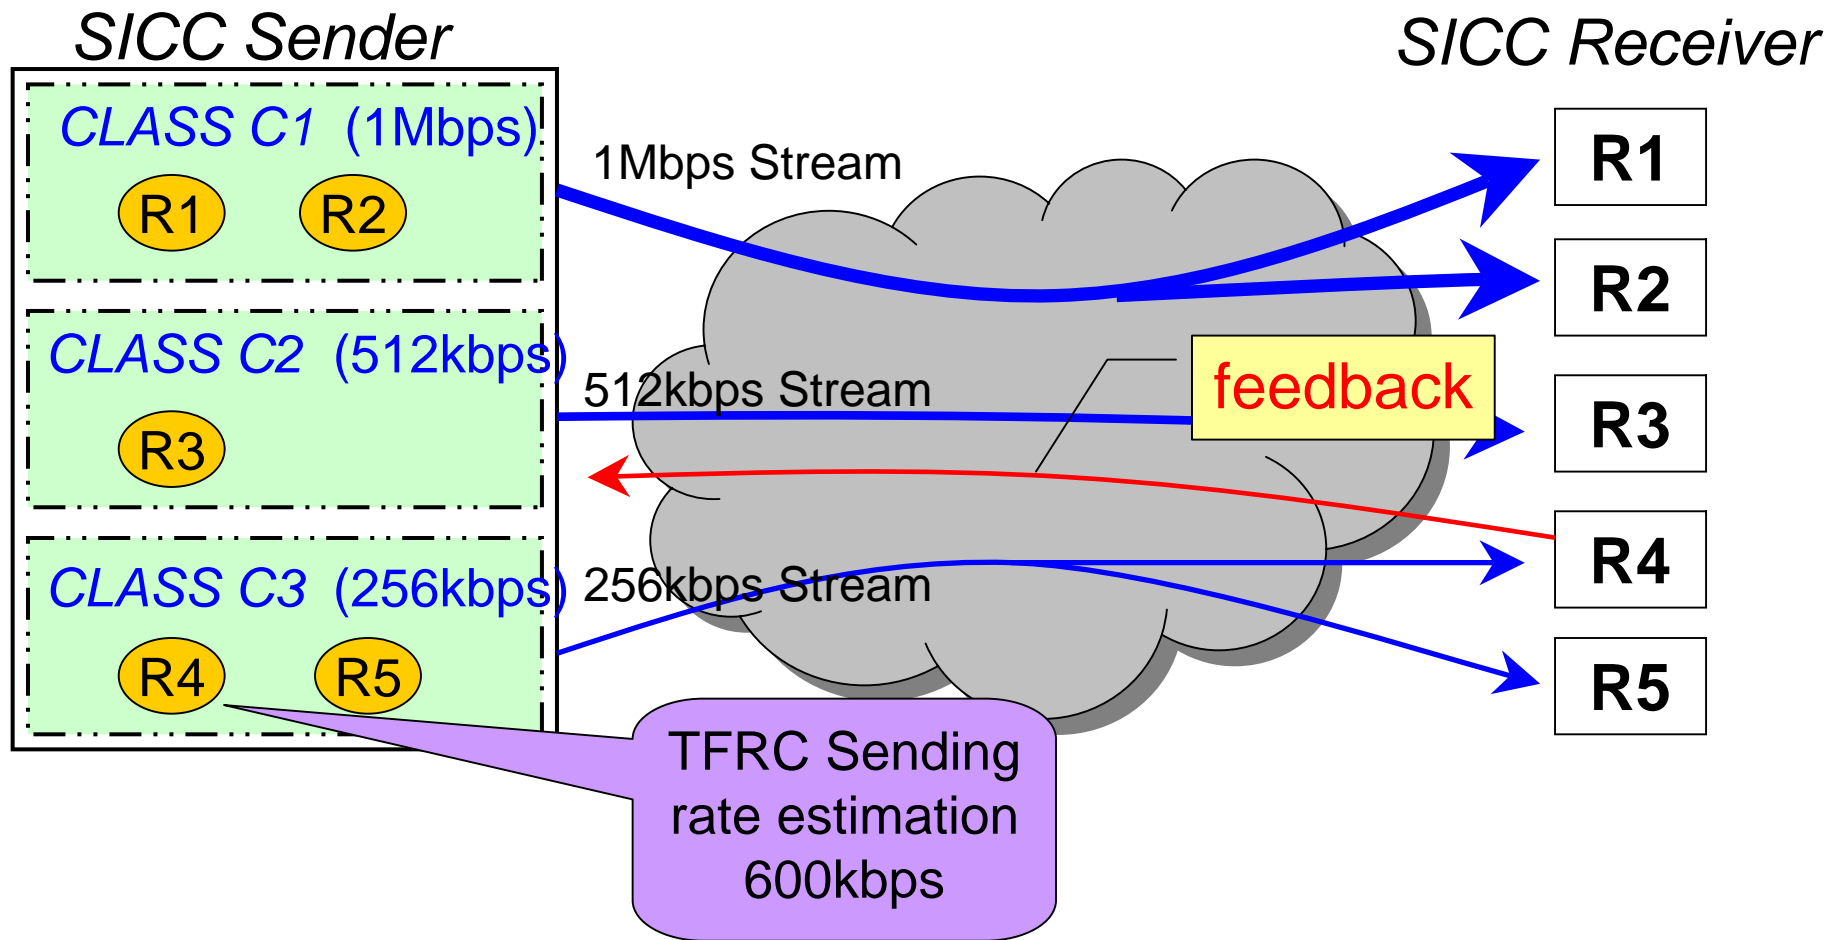


SICC Rate Control Mechanism (2)

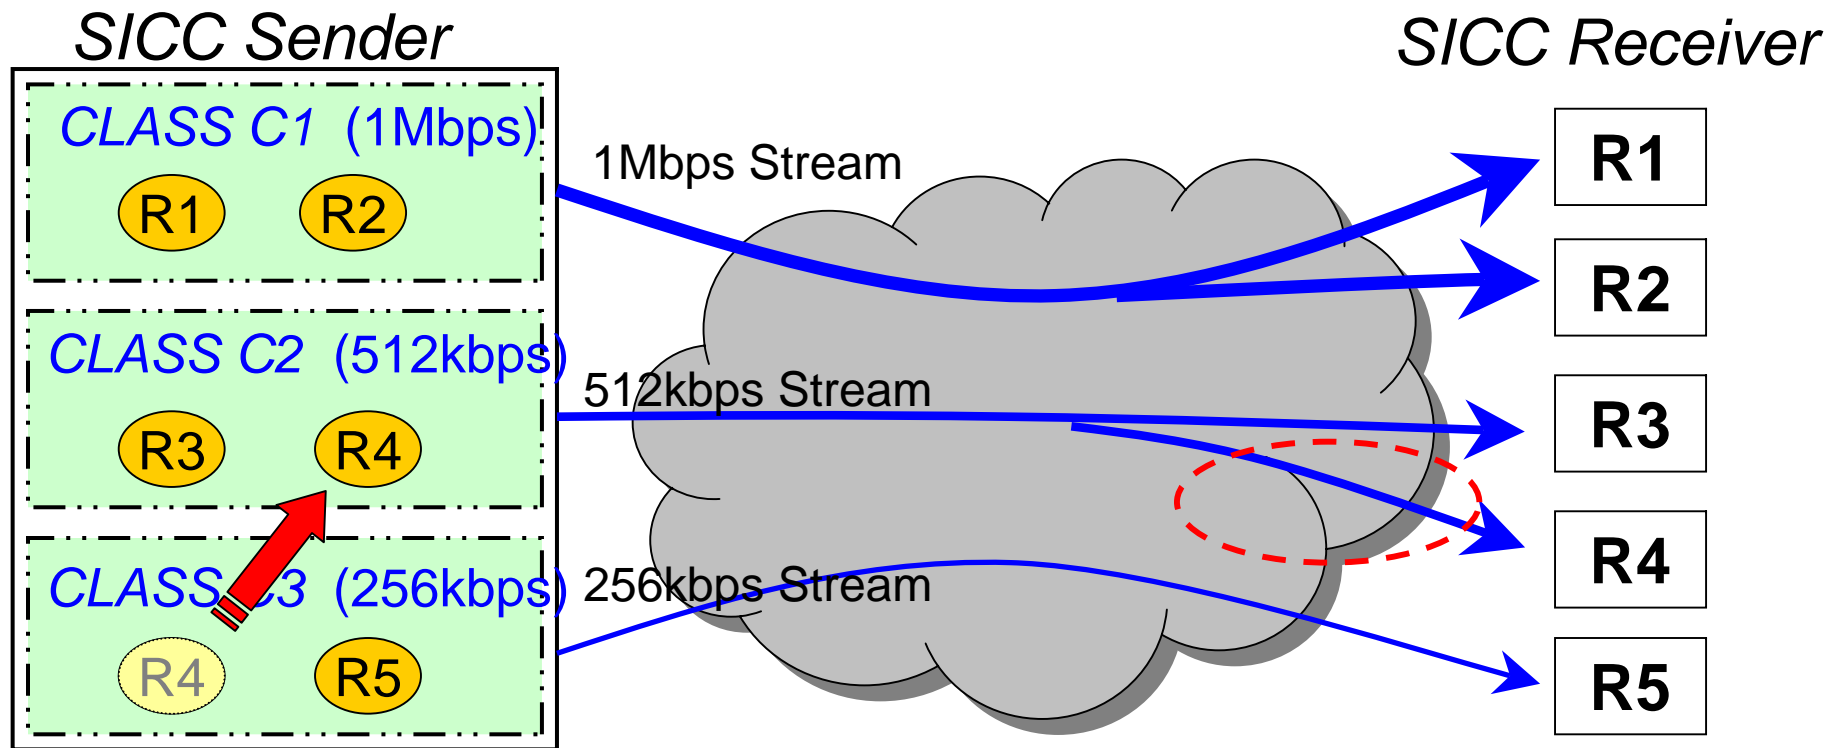

SICC Rate Control Mechanism (3)

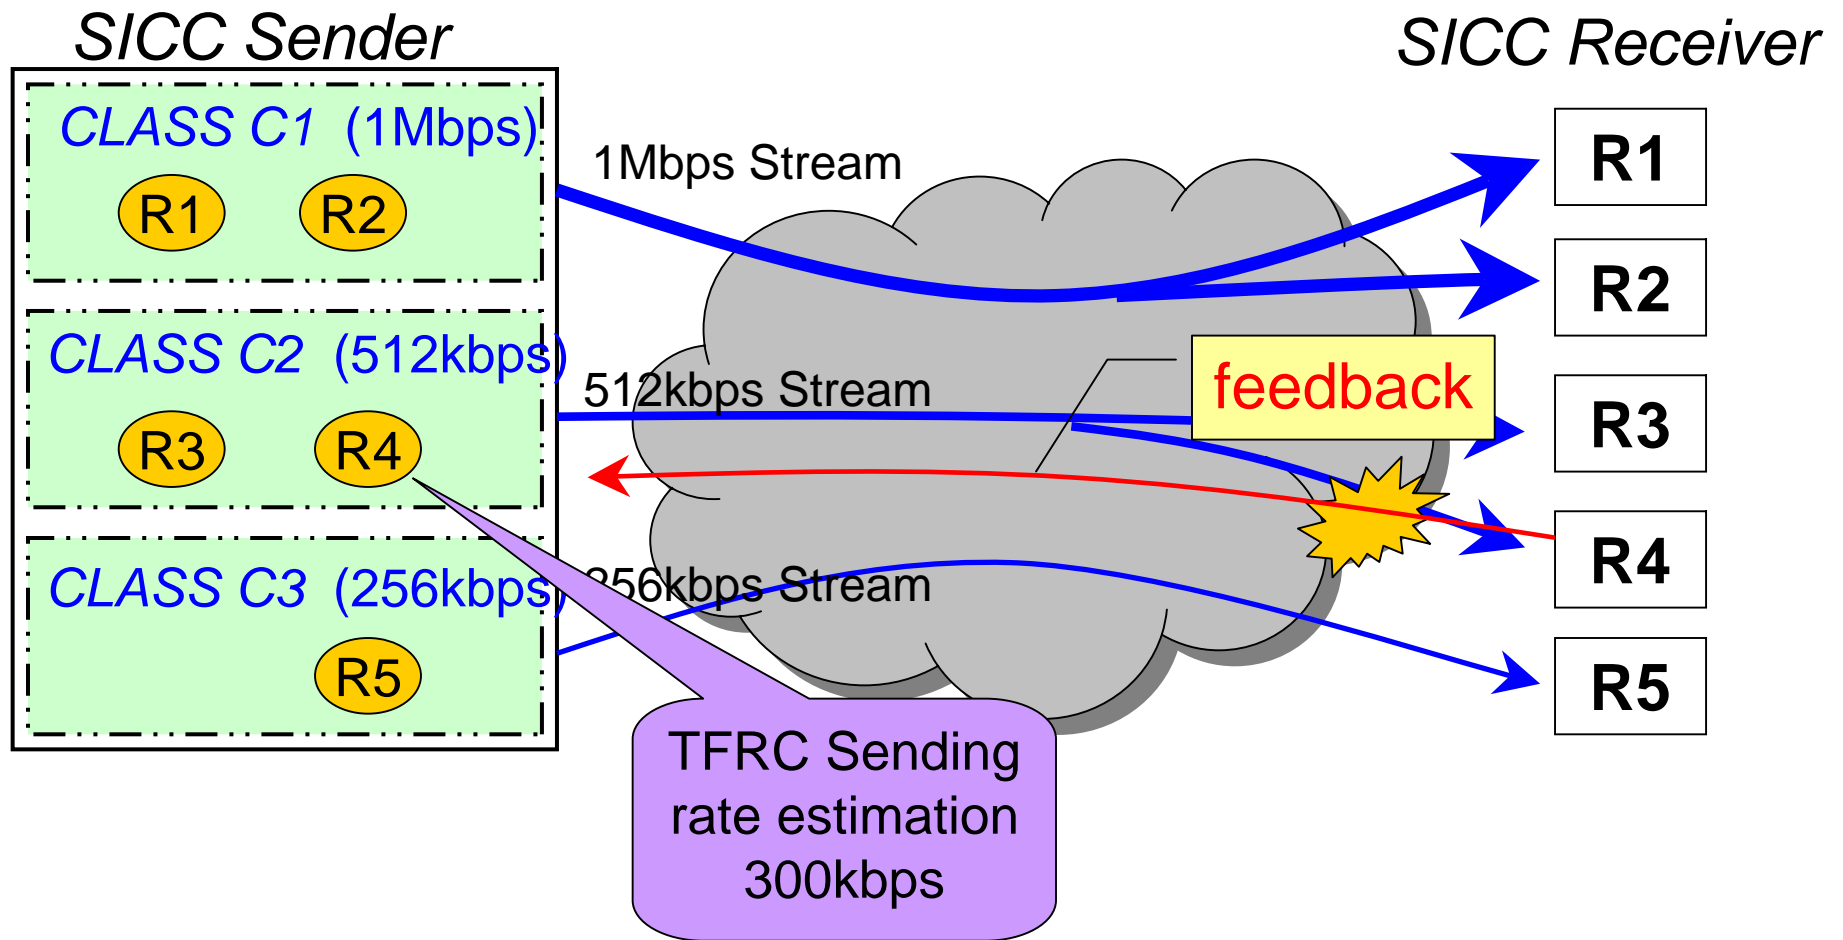

SICC Rate Control Mechanism (4)

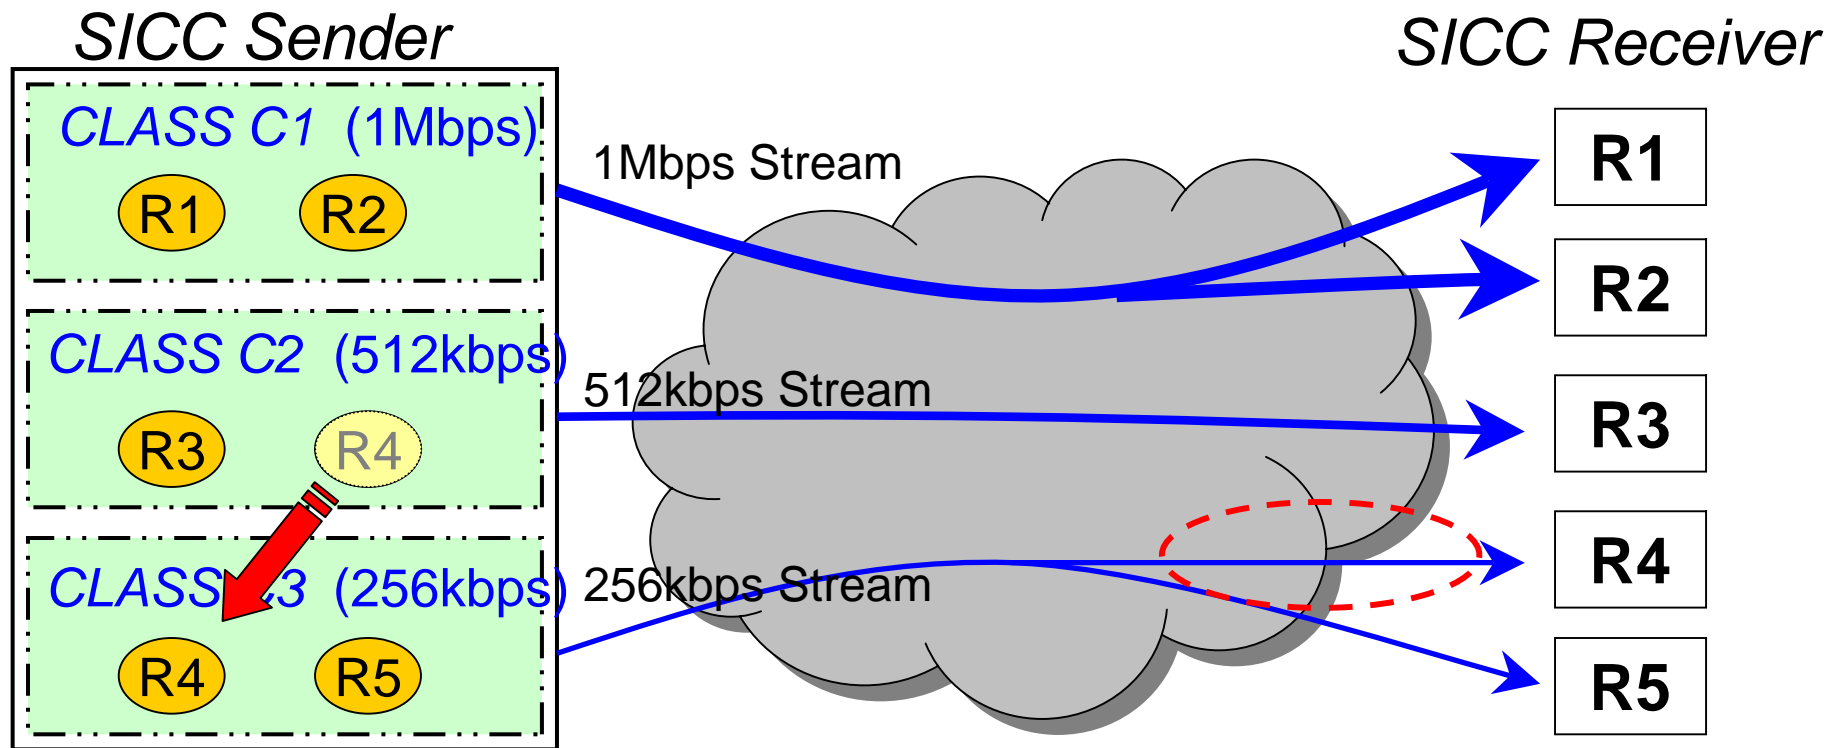

Feature of SICC

- SICC achieve
 - TCP Fairness by estimation of sending rate based on TFRC
 - Intra-Session Fairness by using multiple constant sending rate
 - Fast congestion avoidance by changing the CLASS immediately


Design and Implementation

Requirement of SICC protocol stack

- **Application requirement for various encoding**
 - intra frame codec (M-JPEG, DV)
 - multi streams (MPEG-2,4)
 - layered codec (MPEG4-FGS, SVC)
- **Requirement for Real-time streaming**
 - Handling variable length of Application data unit
 - Notification of the availability on time at receiver
 - Synchronous delivery of multiple sub streams (MPEG4-FGS, SVC)

SICC socket design

- Separation of SICC core and wrapper
 - Core provides flow control to satisfy TCP Fairness
 - Wrappers provide adaptation for each encoding

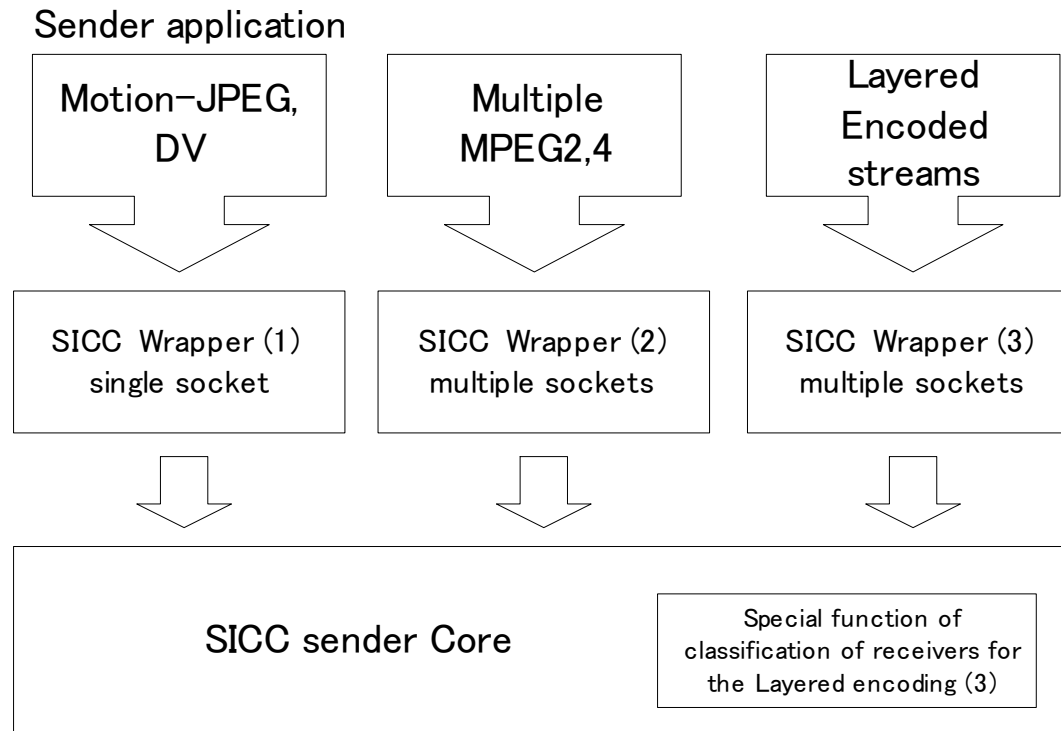

Multiple-implementations

- Purpose & implementation
 - Evaluate the effect of timer accuracy
 - Implement User land NetBSD 1.6.2 with 1ms accuracy (HZ=1000) , it works fine.
 - Proof the concept of the socket design
 - Implement Kernel stack in Linux 2.6.10 and it already works
 - Verify the applicability for small appliance
 - Implement in Micro I-tron which is real time OS for embedding systems
 - Applicable (demonstrated)


Field Experiment

Purpose of the field experiment

- Confirm the TCP Fairness in the field
 - Experiment network with 231 participant
 - Various TCP session

Field experiment environment

- Traffic (by 231 participants in WIDE CAMP)
 - Many and short lived TCP session with long RTT
 - Multiple SICC session with short RTT

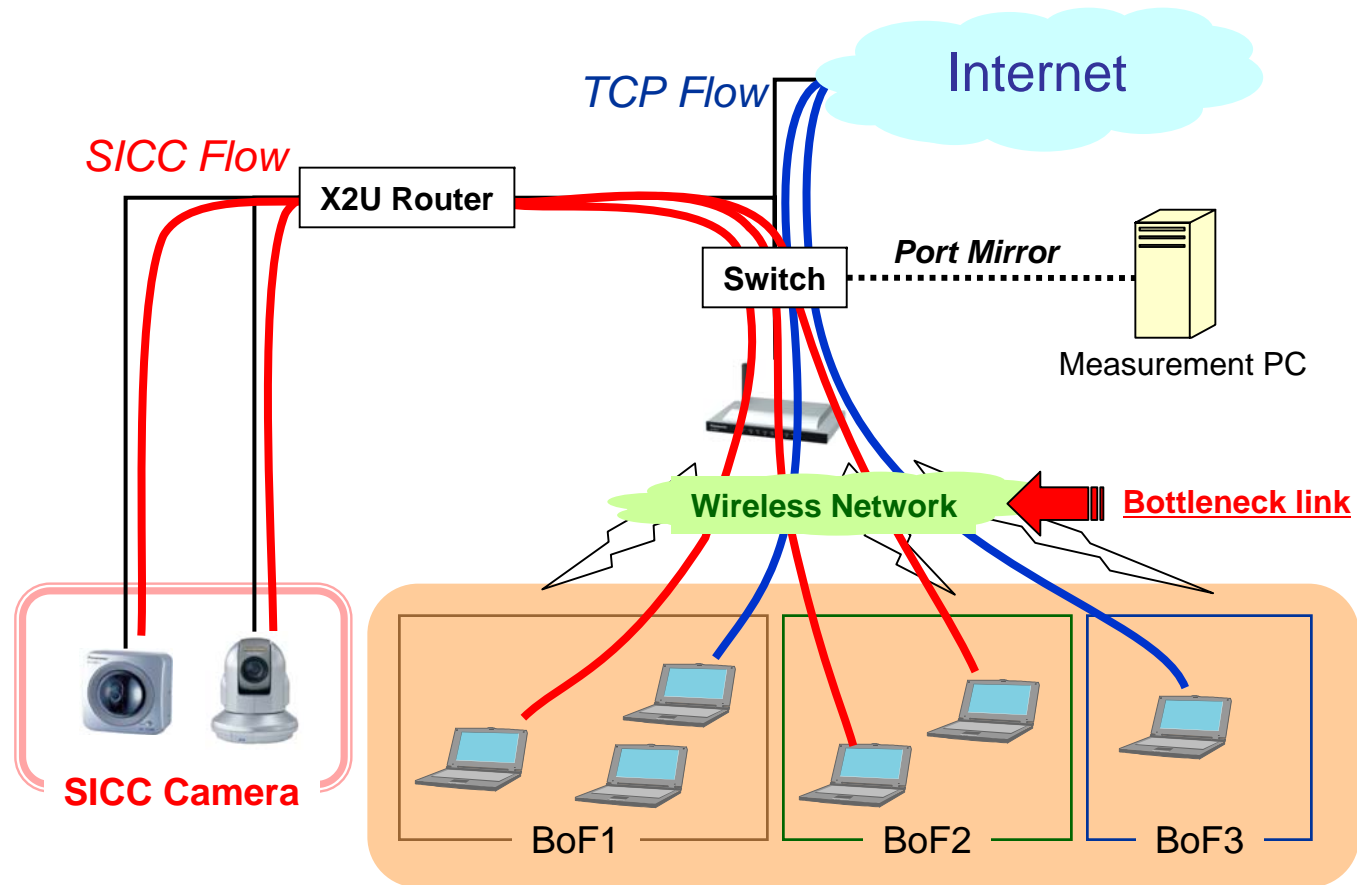

The measurement index

- Mean RTT weighted throughput (T_R) in the field experiment

$$T_R = \sum T_i \times R / S$$


T_i: throughput for each flow

R:RTT of each flow

S: second

The experiment result

- Mostly fair but fluctuated

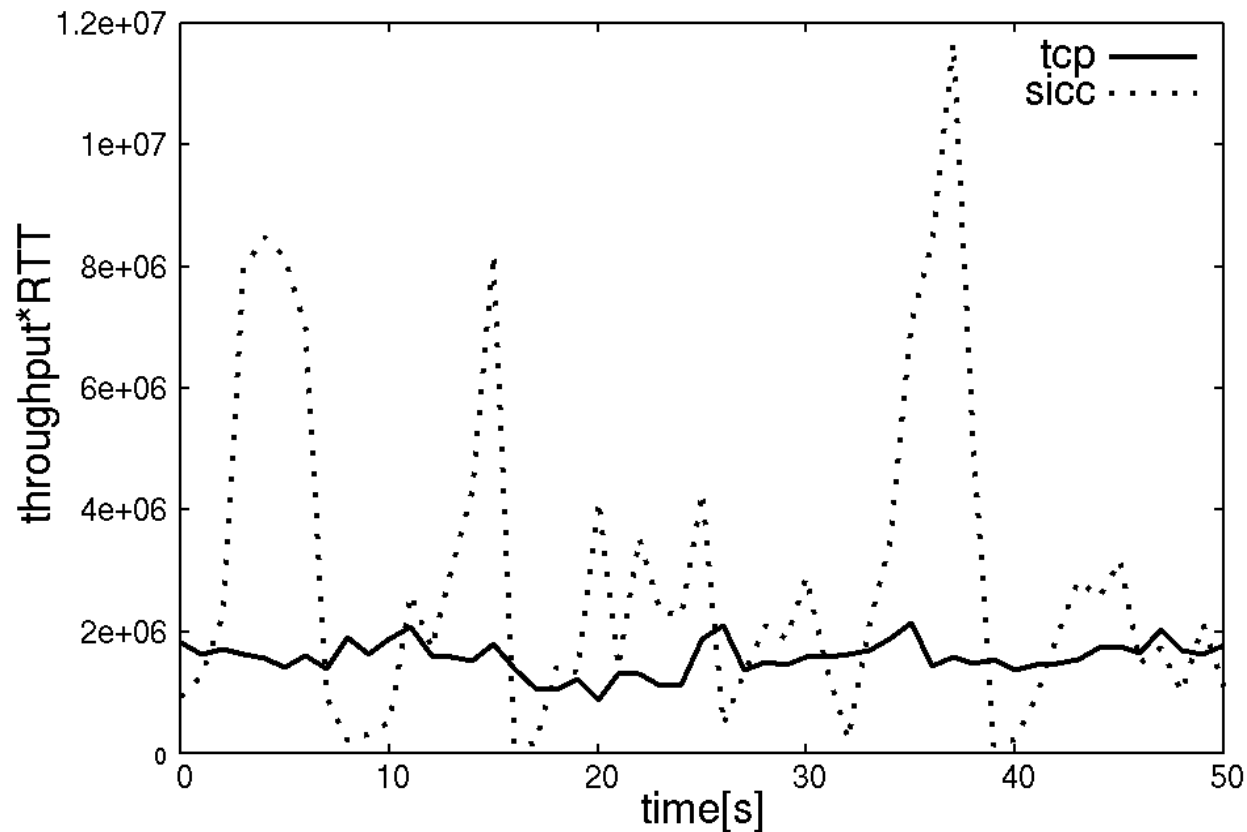

The guessing reason of the fluctuation
- fluctuation of RTT value in wireless LAN

Related work

- DCCP implementation by Nishida
 - Applicable to unicast, not for multicast
- TFMCC, PGMCC
 - TCP Fairness : OK
 - Intra-session-fairness: NG
 - No academic report of a field experiment
- NORM
 - Must be combined to achieve TCP Fairness

Conclusion

- SICC achieve TCP Fairness and Intra-session-fairness at the same time
- We have design and implemented SICC to
 - Prove the concept of socket design
 - Confirm the TCP Fairness with restricted timer accuracy with 1ms timer
 - Verify the applicability to small appliance
- We have had the field experiment with the appliance.


Future Work

- CLASS Change Mechanism
 - We should analyze the oscillation between CLASSes in single SICC session
- Adapting for ALM
 - The calculating time of the ALM sub tree when changing receiver to another CLASS
 - the influence of switching between multiple ALM paths


- Thanks

TCP Fairness (the result in dumbbell)

- SICC achieves TCP Fairness

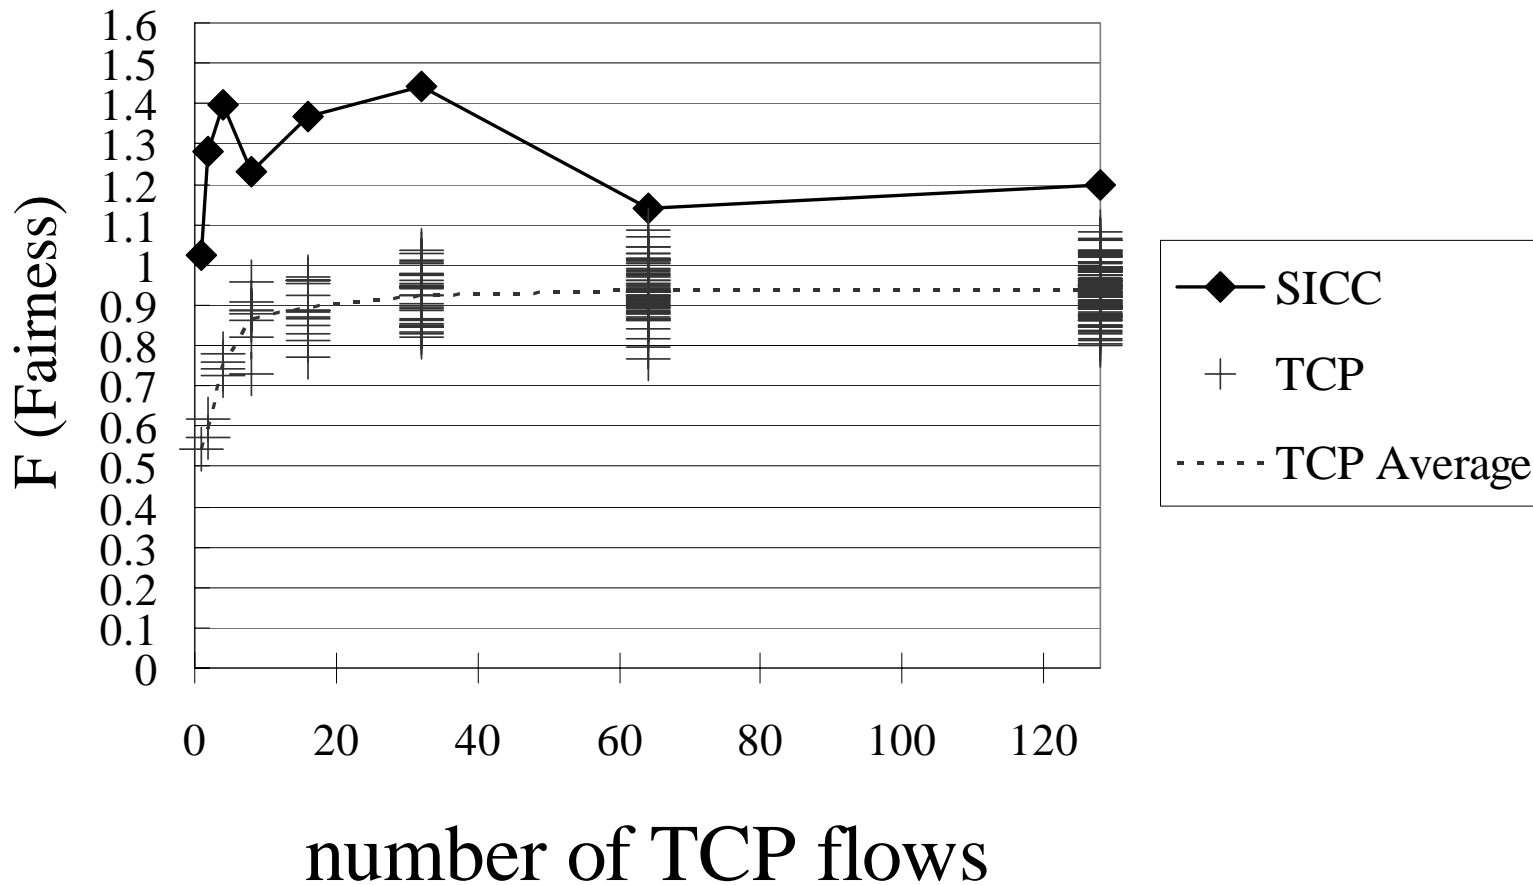

The applicability of SICC on ALM

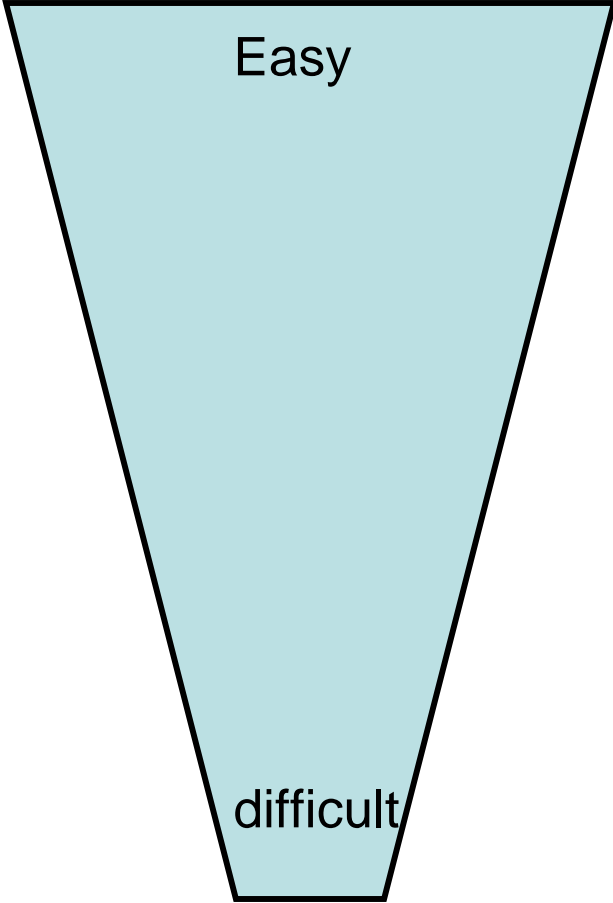ALM (representatives)	Type	Applicability of SICC
<p>“Host multicast(HMTP)” B. Zhang,et.al, 2002</p>	<p>Tree first</p>	
<p>“NICE” S. Banerjee,et al, 2002</p>	<p>Hieratical</p>	
<p>“SCRIBE” M. Castro,et. Al,2002</p>	<p>implicit (decentralized)</p>	
<p>“NARADA” Yang hua Chu,et al,2000</p>	<p>Mesh first</p>	